


LED DIRECT / INDIRECT EXTRUDED LINEAR LUMINAIRE SUSPENDED - 2 1/4"W x 3 3/4"H - PROFILE WITH FROSTED ACRYLIC LED LENS

AL1460

PROJECT NAME

TYPE

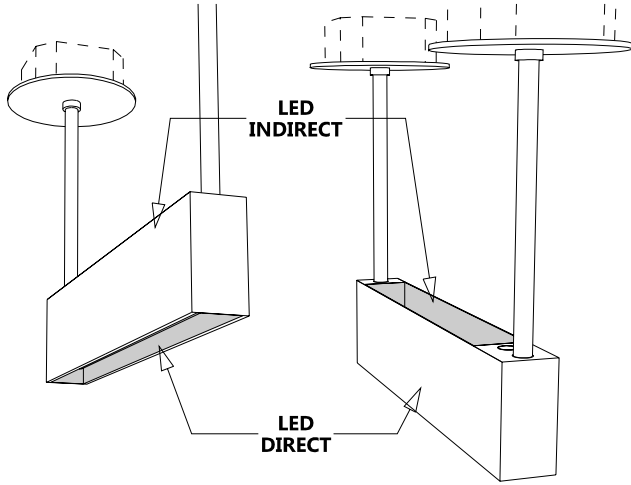

- NARROW EXTRUDED 18 GA CRS HOUSING
- 18 GAUGE CRS END CAPS
- ACRYLIC GLARE FREE LENS
- CONTINUOUS WHITE FROSTED DIFFUSED LENS ILLUMINATION

PROFILE DIMENSIONS: 2.25"W x 3.75"H

STANDARD FIXTURE LENGTHS

24"	60"	108"
36"	72"	120"
48"	84"	132"
		144"

FIXTURE LENGTH

COLOR TEMPERATURE

90 CRI
2700K
3000K
3500K
4000K

COLOR RENDERING INDEX

DRIVER

NON-DIM 120V-277V
DIMMING 0 to 10V 120V-277V
Lutron 5 Series 120V-277V
Lutron Hi Lume Soft On Fade to Black 120V-277V
Lutron 2 Wire Forward Phase 120V only

ND
DIM
LDE5
LDE1
LTEA2W

WATTS / FOOT

5W Nominal/Ft - 700 LUMENS/Ft
7W Nominal/Ft - 1100 LUMENS/Ft
CUSTOM WATTS
(consult factory)

5
7
CW

FINISH

FLAT WHITE
SEMI-GLOSS WHITE
MATTE BLACK
SILVER
CUSTOM FINISH
(consult factory)

FW
SW
MB
SL
CFF

MOUNTING

Adjustable Cable Suspension -50"
Adjustable Cable Suspension -100"
1/2" O.D. Metal Stem Suspension
(specify length)

C50
C100
MSS


OPTIONS

OCCUPANCY SENSOR
DAYLIGHT SENSOR
80 CRI
EMERGENCY CIRCUIT
(Not Available for 24")

OS
DS
80
EM

FOR CONTINUOUS RUNS CONSULT FACTORY


Fixtures are UL and cUL listed.
Listed for dry and damp locations.
Products have limited 5 year warranty.
Products subject to change without notice.
IBEW manufactured and assembled.
Made In U.S.A.




INDIRECT PLAN

SUSPENSION

Points On Center	Overall Length
23"	24"
35"	36"
47"	48"
59"	60"
71"	72"
83"	84"
107"	108"
119"	120"
131"	132"
143"	144"

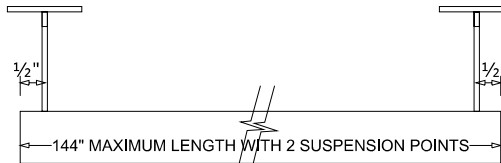


ELEVATION



DIRECT PLAN

FIXTURES ARE NOT JOINABLE

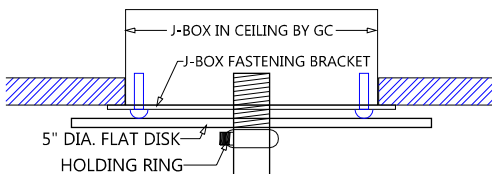

1/2" DIA. METAL STEM EACH END. LENGTH VARIES.

THREADED STEM RECEIVER @ FIXTURE ENDS

PROFILE

