
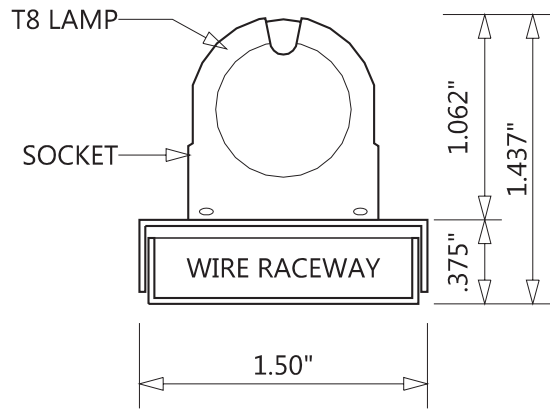


# T-8 FLUORESCENT WITH REMOTE BALLAST

## AL8270

PROJECT NAME

TYPE

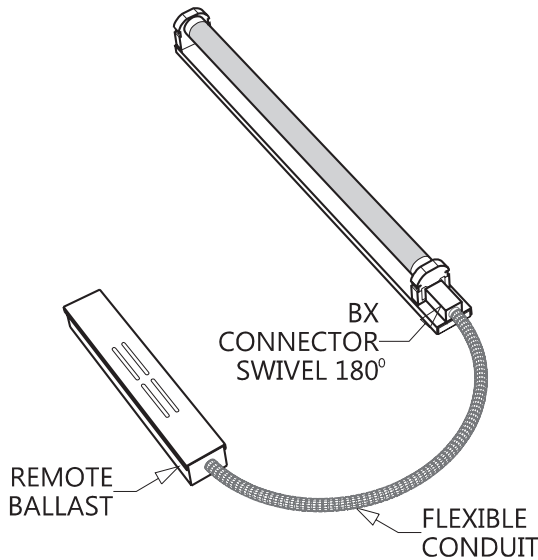

SECTION PROFILE  
SCALE: 1" = 1"

### REFLECTORS



R1




R2



R3



R6



R7

ACCESS	ELECTRIC	FINISH	CONSTRUCTION
ONE PIECE FACE-PLATE ACCESS WITH THREADED MOUNTING SCREWS. BX CONNECTOR SWIVELS 180°. ROTATIONAL LOCKING LAMP HOLDERS	REMOTE BALLAST, SHIPPED SEPARATELY. .98 POWER FACTOR, THD <10%. 10' FIXTURE LEAD WIRE STANDARD ON ALL FIXTURES.	HIGH GLOSS BAKED WHITE ENAMEL FINISH WITH REFLECTIVITY FACTOR OF 89% EFFICIENCY.	DIE-FORMED 20 GAUGE COLD ROLLED STEEL WITH ELECTRICALLY WELDED END PLATES. 1 1/4" BX CONNECTOR TO FLEXIBLE CONDUIT, ONE END ONLY, INCLUDED IN OVERALL LENGTH OF FIXTURE.

### ORDERING INFORMATION

SERIES	LAMP CODE		VOLTAGE	OPTIONS
AL8270			120 OR 277	
	LAMP CODE	OVERALL LENGTH		
	T8 - 5'	F40T8		TW TANDEM WIRING (WHEN APPLICABLE)
	T8 - 4'	F32T8		D DIMMING
	T8 - 3'	F25T8		REF REFLECTOR (OPTIONS LISTED ABOVE)
	T8 - 2'	F17T8		CR CUSTOM REFLECTOR (CONSULT MFG)
	T8-18"	F15T8		EM EMERGENCY BALLAST
	T8-15"	F14T8		CWB COLD WEATHER BALLAST 0 DEGREE
				DAMP DAMP LOCATION
				CC CUSTOM COLOR (SPECIFY)
				LLW LONGER LEAD WIRE (CONSULT MFG)
				MOD MODIFICATION (CONSULT MFG)

**CONSULT FACTORY FOR  
CUSTOM LONG RUNS**

**FOR LAMPING INFORMATION CLICK HERE**

ALL FIXTURES ARE UL LISTED AND BEAR IBEW LABELS. PRODUCTS SUBJECT TO CHANGE WITHOUT NOTICE.