



RECESSED ONE LAMP PROFILE T8 LINEAR DOWNLIGHT

with SYMMETRICAL SPECULAR ALUMINUM REFLECTOR
WRAP-AROUND TEGULAR GRID FLANGE and ACRYLIC LENS

AL8400

PROJECT NAME

TYPE

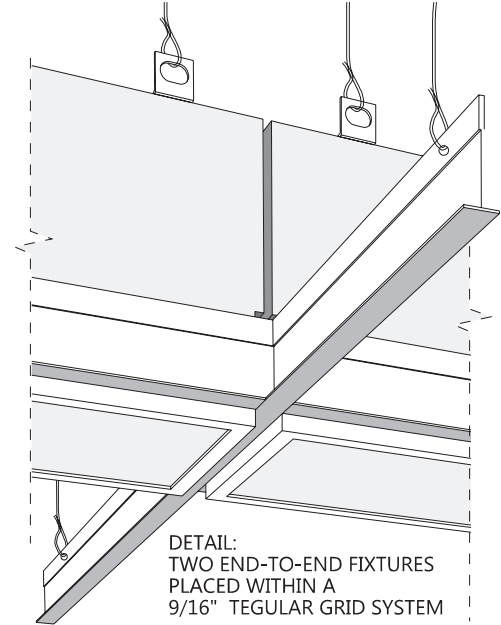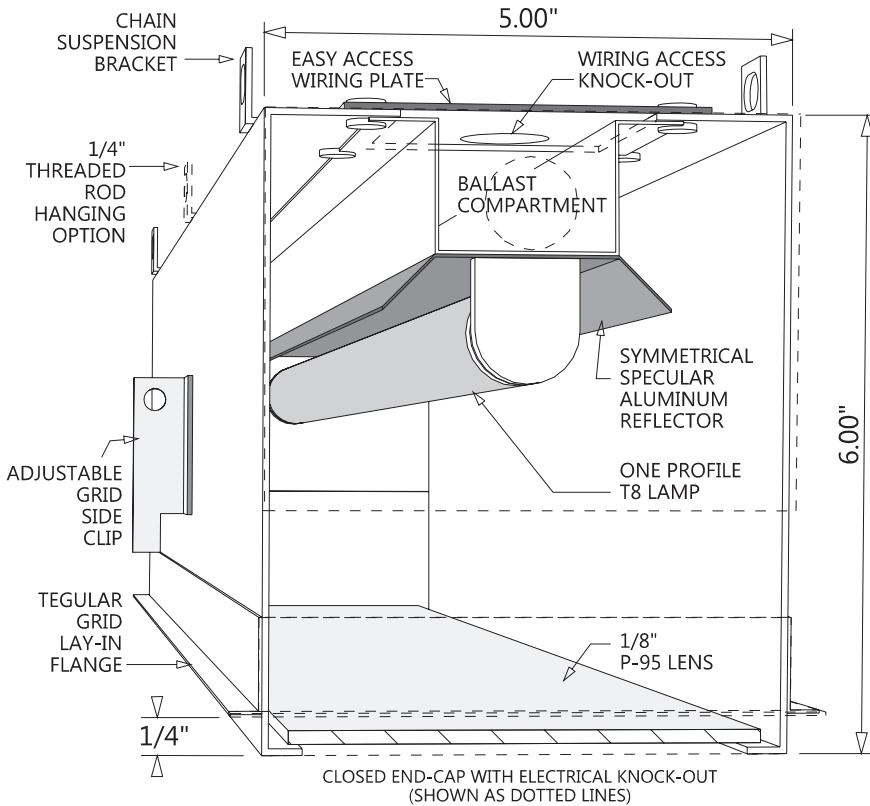

| ACCESS | ELECTRIC | FINISH | CONSTRUCTION |
|--|---|--------------------------|--|
| EASY ACCESS BALLAST COMPARTMENT WIRING PLATES ON FIXTURE TOP. LIFT OUT ACRYLIC LENS FOR RE-LAMPING. ROTATIONAL LOCKING LAMP HOLDERS. | ELECTRONIC INTEGRAL INDIVIDUAL BALLAST. | HOUSING: MATTE WHITE | DIE-FORMED 20 GAUGE COLD ROLLED STEEL FINISHED CLOSED END CAPS, KO EA. END. ~EASY ACCESS WIRING PLATES ~CHAIN SUSPENSION BRACKETS ~LAY-IN FLANGE ON ALL SIDES ~WRAP-AROUND LIP FOR LENS FIXTURE MEETS CITY CODE REQUIREMENTS. |
| | REFLECTOR | LENS | |
| | SYMMETRICAL, SPECULAR ALUMINUM | 1/8" P-95 MATTE WHITE | |

ORDERING INFORMATION

| SERIES | LAMP CODES | VOLTAGE | OPTIONS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|-----------|---------|-------------------|-----|-------------------|-----|------------|-----|------------|-----|------------|-----|------------|-----|------------------|---|----|--------------|-----------|---|---------|--|----|-------------------|--|-----|-------------------------------|--|-----|--|--|
| AL8400 | <table border="1"> <thead> <tr> <th>CODE</th> <th>LENGTH</th> </tr> </thead> <tbody> <tr> <td>(2) 32W T8 TANDEM</td> <td>96"</td> </tr> <tr> <td>(2) 25W T8 TANDEM</td> <td>72"</td> </tr> <tr> <td>(1) 40W T8</td> <td>60"</td> </tr> <tr> <td>(1) 32W T8</td> <td>48"</td> </tr> <tr> <td>(1) 25W T8</td> <td>36"</td> </tr> <tr> <td>(1) 17W T8</td> <td>24"</td> </tr> </tbody> </table> | CODE | LENGTH | (2) 32W T8 TANDEM | 96" | (2) 25W T8 TANDEM | 72" | (1) 40W T8 | 60" | (1) 32W T8 | 48" | (1) 25W T8 | 36" | (1) 17W T8 | 24" | 120 OR 277 | <table border="1"> <tbody> <tr> <td>CC</td> <td>CUSTOM COLOR</td> <td>(SPECIFY)</td> </tr> <tr> <td>D</td> <td colspan="2">DIMMING</td> </tr> <tr> <td>EM</td> <td colspan="2">EMERGENCY BALLAST</td> </tr> <tr> <td>CWB</td> <td colspan="2">COLD WEATHER BALLAST 0 DEGREE</td> </tr> <tr> <td>CA*</td> <td colspan="2">FOR CUSTOM APPLICATIONS CONSULT FACTORY</td> </tr> </tbody> </table> | CC | CUSTOM COLOR | (SPECIFY) | D | DIMMING | | EM | EMERGENCY BALLAST | | CWB | COLD WEATHER BALLAST 0 DEGREE | | CA* | FOR CUSTOM APPLICATIONS CONSULT FACTORY | |
| CODE | LENGTH | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (2) 32W T8 TANDEM | 96" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (2) 25W T8 TANDEM | 72" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (1) 40W T8 | 60" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (1) 32W T8 | 48" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (1) 25W T8 | 36" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (1) 17W T8 | 24" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CC | CUSTOM COLOR | (SPECIFY) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | DIMMING | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| EM | EMERGENCY BALLAST | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CWB | COLD WEATHER BALLAST 0 DEGREE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CA* | FOR CUSTOM APPLICATIONS CONSULT FACTORY | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FOR LONG CONTINUOUS RUNS CONSULT FACTORY | FOR LAMPING INFORMATION CLICK HERE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

ALL FIXTURES ARE UL LISTED AND BEAR IBEW LABELS. PRODUCTS SUBJECT TO CHANGE WITHOUT NOTICE.